

FICHA PISTOLA PARA INFLADO DE DUNNAGE AIR BAG



La STORM AIR GUN, fue diseñada para inflar de manera sencilla los sacos separadores de pallets (DUNNAGE AIR BAGS) dentro de los contenedores.

Estas Bolsas son un tipo de material de embalaje utilizado en el transporte de mercancías. Están diseñadas para llenar el espacio vacío entre la carga y las paredes del contenedor, evitando que los productos se muevan y se dañen durante el transporte. Las bolsas inflables se pueden utilizar en camiones, barcos y trenes para asegurar la carga.

ESPECIFICACIONES


- TURBO VALVE
- PRESION DE TRABAJO 1 Psi
- ARMAZON PP
- PESO 350 Grs.
- DIMENSIONES 240x170x60mm

Instructions for Airbags inflation with ProAir Inflator Gun


Your Solution For Cargo Protection

I. VALVE CHECK

1. Check if the valve is closed before inflation. If it is opened, press and turn to the left the screw to close it back.

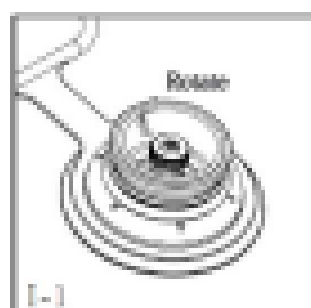


2. Check if the connector ② fit the air pump. Press on the switch ③ to make sure the trigger is unlocked.

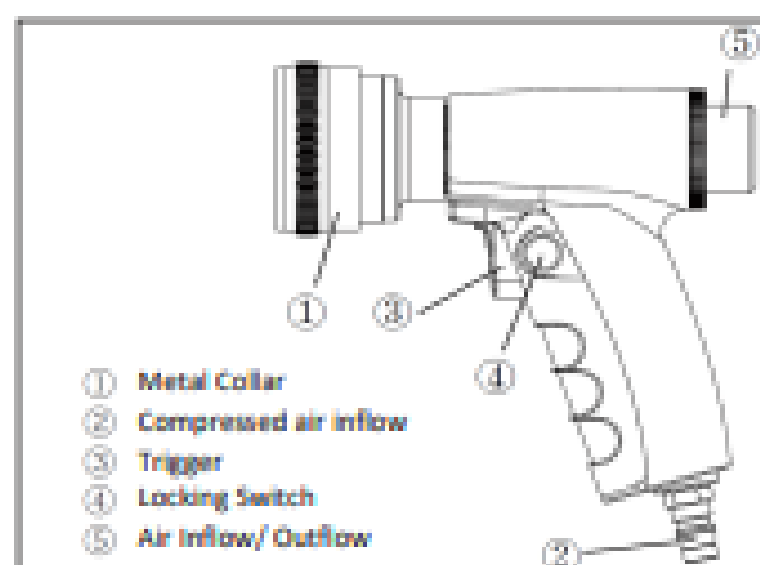

II. INFLATION




1. Make sure the metal collar ① is in back position.

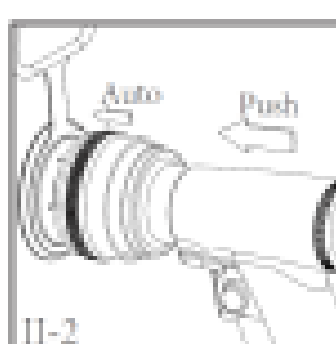

2. Connect the airgun to the valve vertically. Once you hear a clip sound, it is ready to inflate.



3. Press trigger ① to inflate. If you need to inflate without pressing on the trigger, press ①+②. Press ① to release back the trigger.

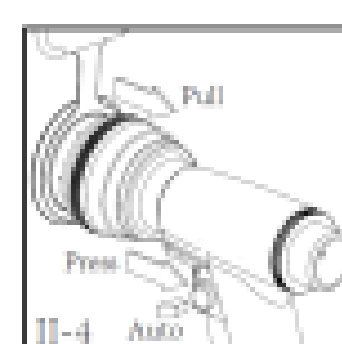


4. When the airbag is full, take off the airgun while inflating, by pulling out the metal collar. Then, stop the airflow. If you stop the airflow with the airgun still attached on the airbag, some air will come out!


III. DEFLATION



1. Turn the screw clockwise to open the valve.

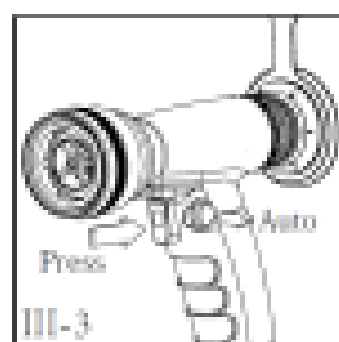

2. Put the tube ⑤ into the valve of the airbag. Press the trigger to deflate to airbag.

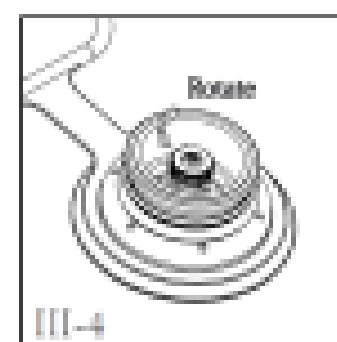

3. Pull out the inflator gun, and turn the screw to the left to close back the valve.